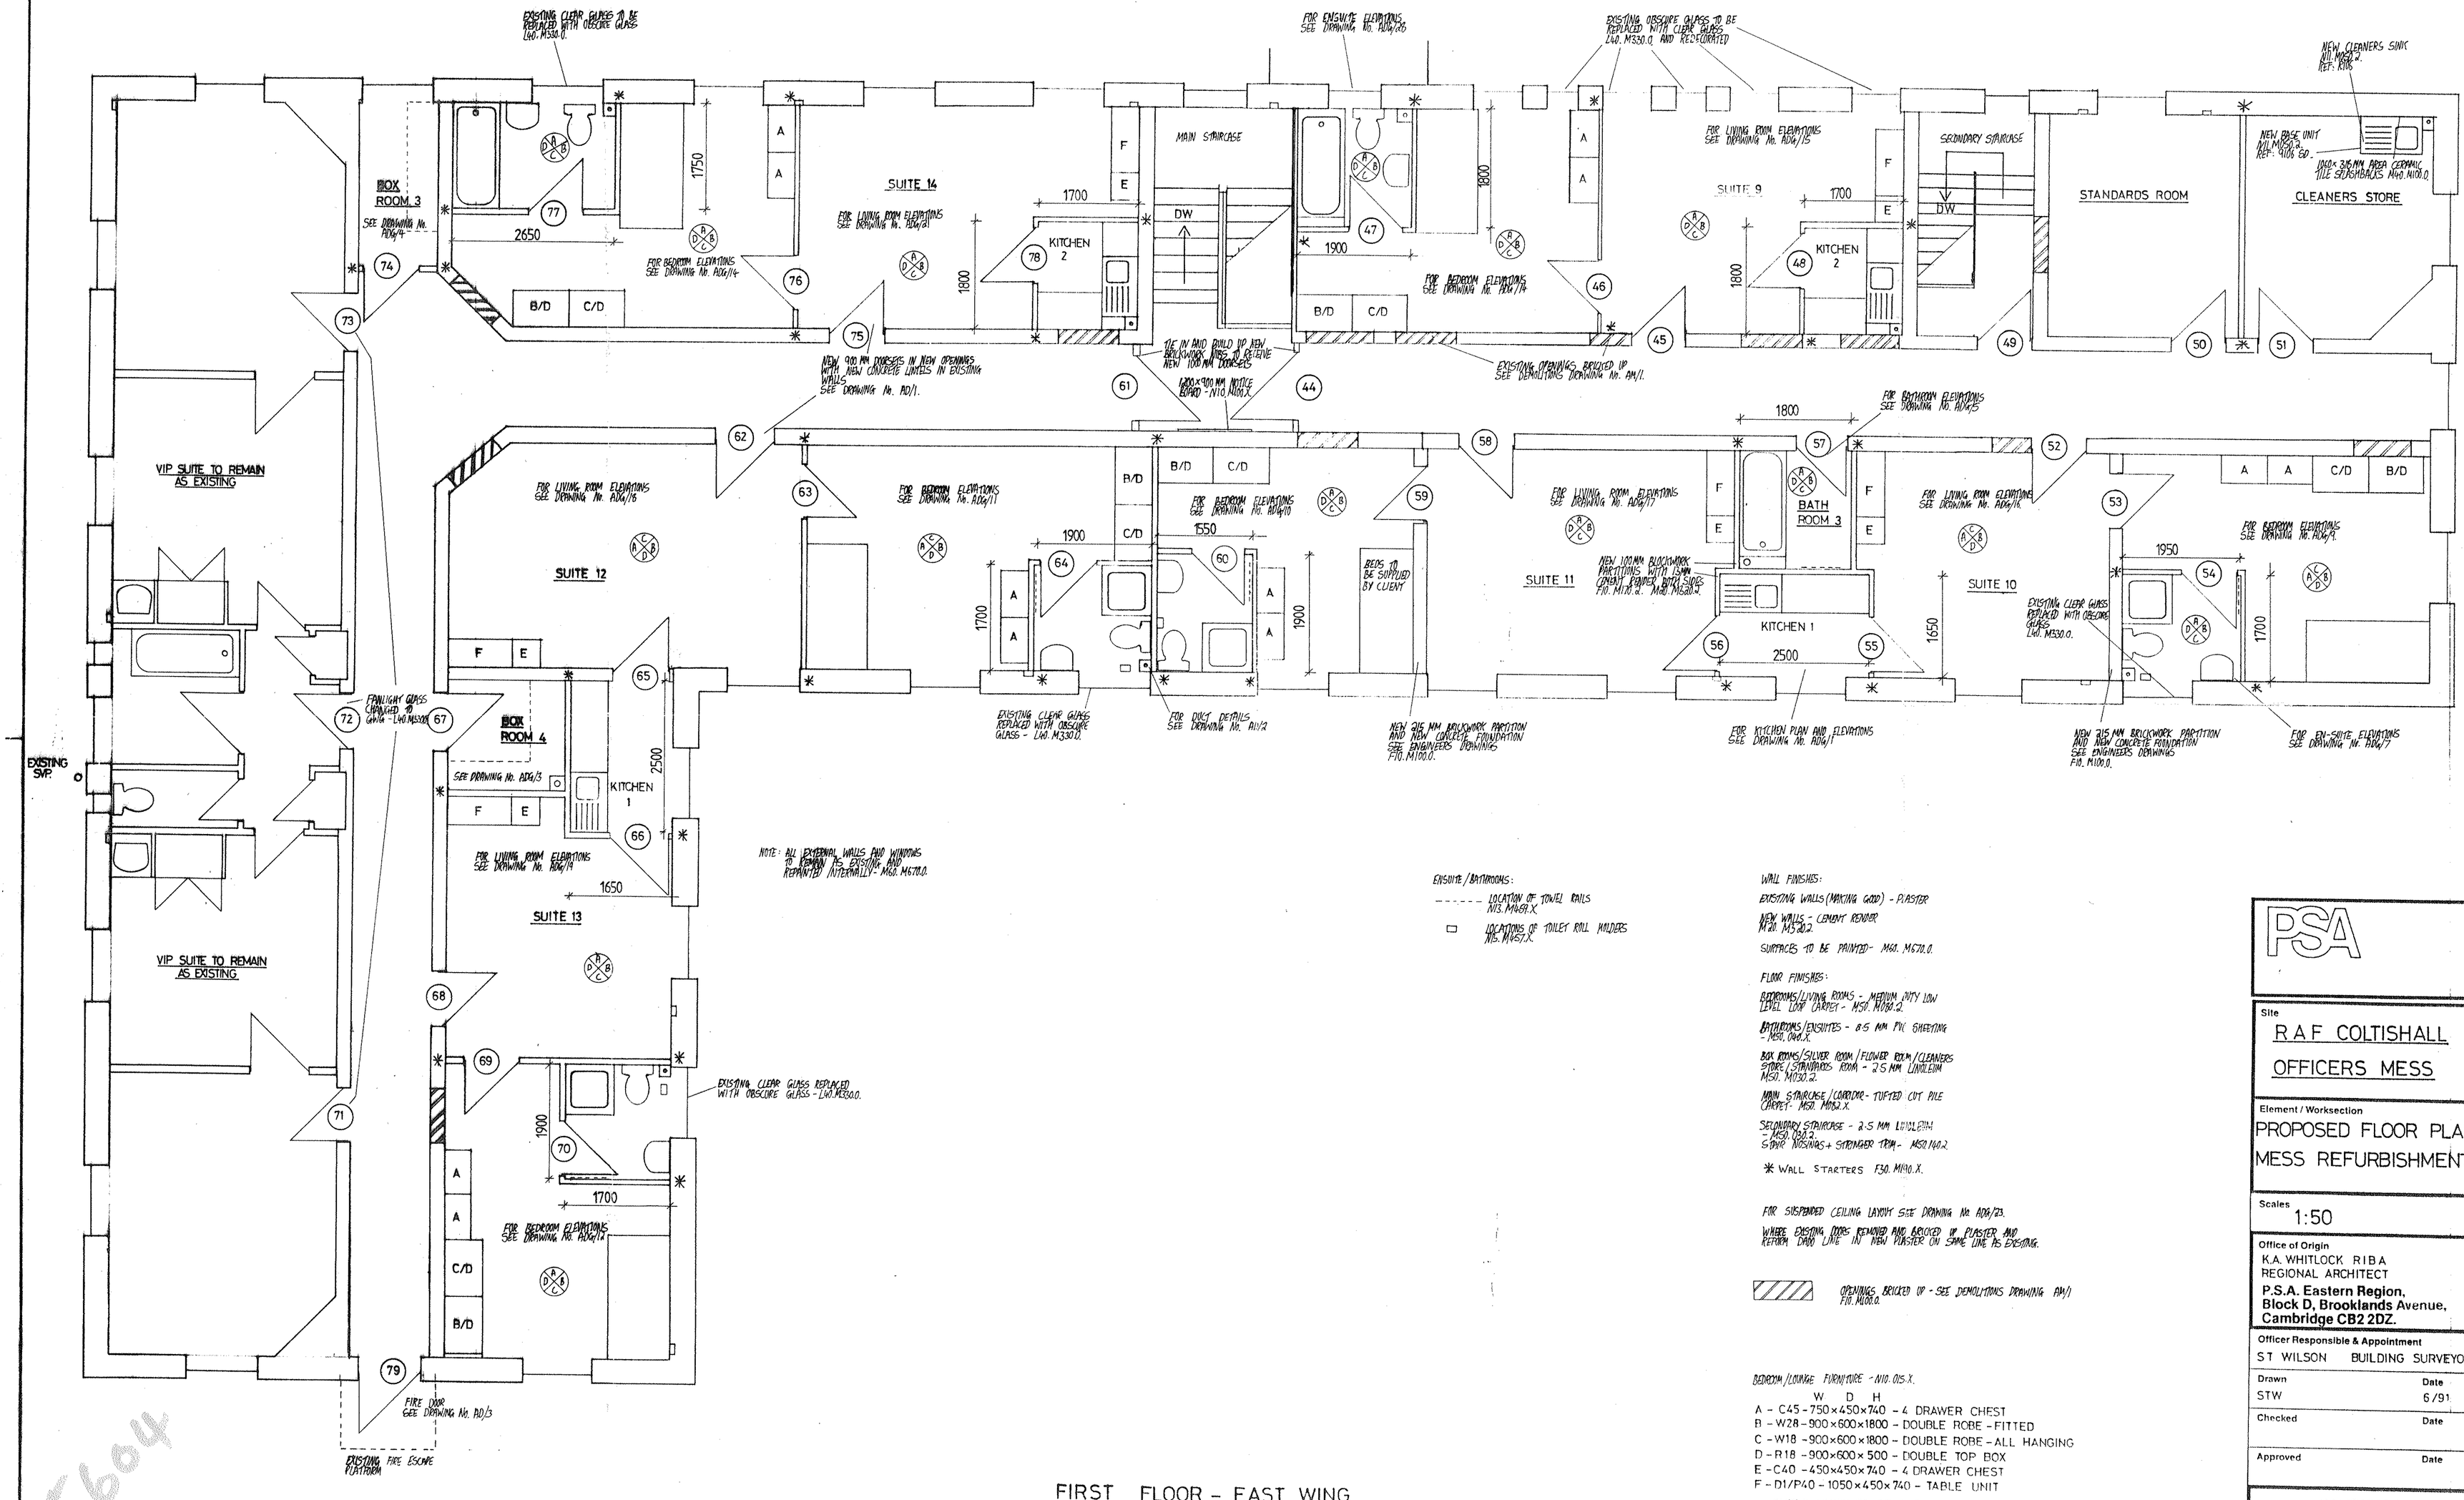

ENSUITE/BATHROOMS:

- LOCATION OF TOWEL RAILS M13. M461.X.
- LOCATIONS OF TOILET ROLL HOLDERS M13. M467.X.

WALL FINISHES:

EXISTING WALLS (MAKING GOOD) - PLASTER

NEW WALLS - CEMENT RENDER M20. M52.2

SURFACES TO BE PAINTED - M60. M670.0.

FLOOR FINISHES:

BEDROOMS/LIVING ROOMS - MEDIUM DUTY LOW LEVEL LOOP CARPET - M50. M080.2.

BATHROOMS/ENSUITES - 2.5 MM PVC SHEETING - M50. 060.X.

BOX ROOMS/SILVER ROOM/FLOWER ROOM/CLEANERS STORE/STANDARDS ROOM - 2.5 MM LINOLEUM M50. M030.2.

MAIN STAIRCASE/CORRIDOR - TUFTED CUT PILE CARPET - M50. M062.X.

SECONDARY STAIRCASE - 2.5 MM LINOLEUM - M50. 030.2. STAIR NOSINGS + STRINGER TRIM - M50 140.2.

* WALL STARTERS F30. M190.X.

FOR SUSPENDED CEILING LAYOUT SEE DRAWING No. AD6/23.

WHERE EXISTING DOORS REMOVED AND BRICKED UP PLASTER AND REFORM DADO LINE IN NEW PLASTER ON SAME LINE AS EXISTING.

OPENINGS BRICKED UP - SEE DEMOLITIONS DRAWING AM/1 F10. M100.0.

BEDROOM/LOUNGE FURNITURE - M10. 015.X.

	W	D	H	
A - C45 -	750	x 450	x 740	- 4 DRAWER CHEST
B - W28 -	900	x 600	x 1800	- DOUBLE ROBE - FITTED
C - W18 -	900	x 600	x 1800	- DOUBLE ROBE - ALL HANGING
D - R18 -	900	x 600	x 500	- DOUBLE TOP BOX
E - C40 -	450	x 450	x 740	- 4 DRAWER CHEST
F - D1/P40 -	1050	x 450	x 740	- TABLE UNIT

SHELF UNITS TO BE INCLUDED

FIRST FLOOR - EAST WING

ARCHIVED TO CD

5604

ABS 8888. 10/88. 8282888.

PSA

Site
R A F COLTISHALL
OFFICERS MESS

Element / Worksection
PROPOSED FLOOR PLAN
MESS REFURBISHMENT

Scales
1:50

Office of Origin
K.A. WHITLOCK RIBA
REGIONAL ARCHITECT
P.S.A. Eastern Region,
Block D, Brooklands Avenue,
Cambridge CB2 2DZ.

Officer Responsible & Appointment
S T WILSON BUILDING SURVEYOR

Drawn	Date
STW	6/91
Checked	Date
Approved	Date

Project Nr. 4W/910134

Drawing Nr. GMN-5/91/AB/2

Revision